



Model 200T-000


Tanning Spray Gun

WARNING: Consult the product label and Material Safety Data Sheet if supplied for the spray material. Follow all recommended safety precautions. Well Ventilated Area Required to remove fumes or overspray.
Maximum Air Pressure 70 P.S.I.

OPERATING INSTRUCTIONS AND REPLACEMENT PARTS

OPERATION:

1. Connect air hose to compressor and **200T-000** Spray Gun. Make sure couplings are wrench tight.
 - a. Teflon tape can be added to the male connections on the spray gun and air compressor to help prevent any air leaks. Air leaks will decrease air pressure to the spray gun.
2. a. If your compressor has a regulator, set pressure to 11-15 psi.
 - b. We recommend using the Paasche D200 or DA400R Air Compressor.
3. Adjust Fluid Knob on the Spray Gun until desired spray is reached.
4. Sprayer should be held 10-12 inches from area being sprayed.
5. To Clean, fill bottle with hot water and spray for several seconds into an absorbent container.

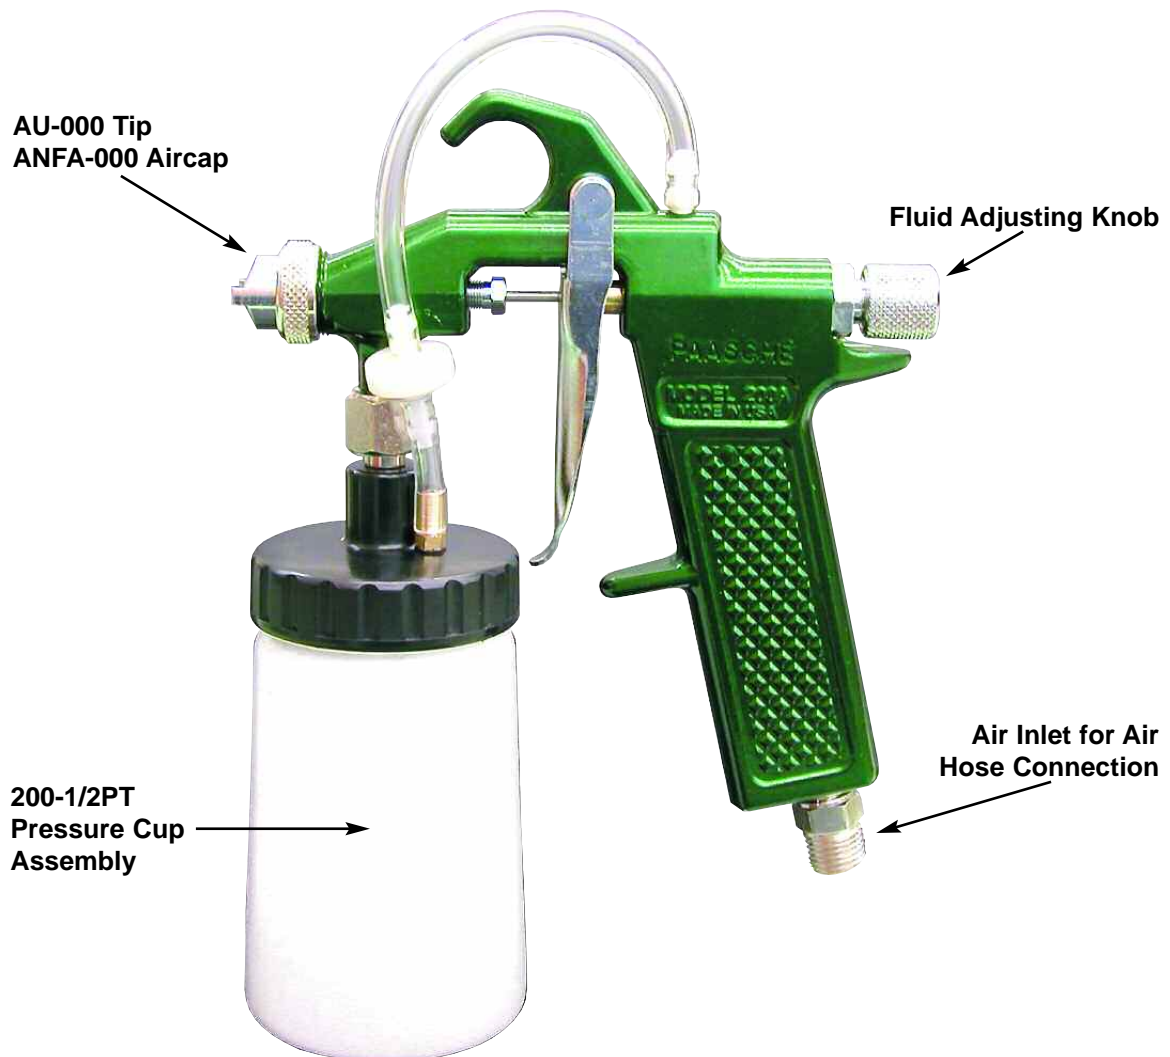

Paasche Airbrush Company
4311 North Normandy Avenue
Chicago, IL 60634-1395
Phone: 773-867-9191 • Fax: 773-867-9198
Website: paascheairbrush.com
E-Mail: info@paascheairbrush.com